

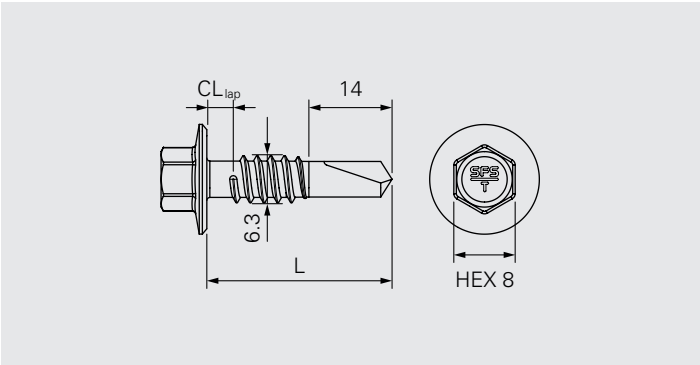


SL3-H15-6.3

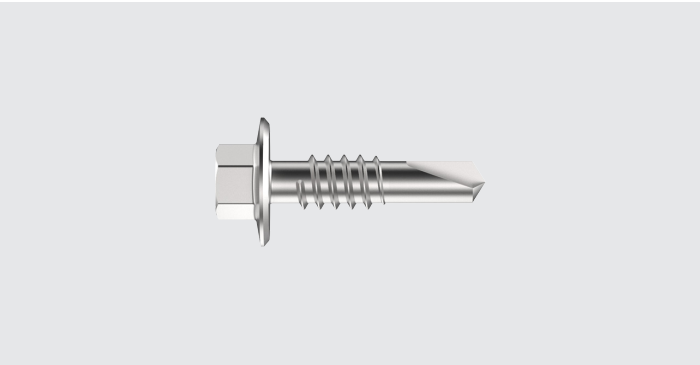

Application

Fastening of overlaps of metal decks, liner trays
Fastening of metal profiles onto profile sheets

Component 1 (t _I)		Component 2 (t _{II})		Σ _{max} t _I + t _{II}
Steel	1.0–2.0	Steel	1.0–2.0	3.50

Fastener material

Carbon steel, Durocoat® 480

Approvals

ETA-10/0198

Features and Benefits


- Self drilling fastener suitable for fastening of overlaps
- No torque control required given by free-spin zone
- Secured against unwinding given by cut-off thread-end and free-spin zone
- High tension and shear resistance achieved by optimized fastener geometry
- High corrosion durability thanks to special galvanic zinc coating

Documentation

Approval document (ETA) | Declaration of performance (DoP)


All measures in mm

All information is non-binding and without guarantee. Before using the products, all specifications and calculations must be checked by a suitably qualified person and local regulations must be observed. This document is subject to revision. We reserve the right to make technical changes.



Fastener in carbon steel onto steel

Product code	PU	L	CL _{lap}	
SL3-H15-6,3×24	500	24	2.0–3.50	984607
SL3-H15-6,3×32	500	32	2.0–3.50	3615

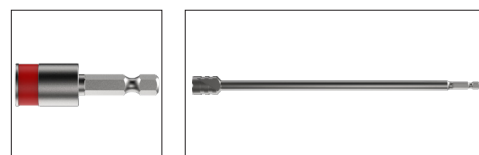

Accessories/Ancillaries

Product code	PU	Drive	Head drive	
E308-¼"-50	1	¼"	HEX8	1646160
Drive shaft H15 head	5	¼"	H15	1517546

All measures in mm

All information is non-binding and without guarantee. Before using the products, all specifications and calculations must be checked by a suitably qualified person and local regulations must be observed. This document is subject to revision. We reserve the right to make technical changes.